

Queen


Direct acting 2-way solenoid valves normally closed, energized to open



Features:

1. Suitable for water, carbonated water (special design for home-used reverse osmosis water filtration system).
2. Direct acting 2-way solenoid valve, fast response and long life.
3. Can be mounted in vertical and horizontal position.

Model	Connection	Orifice (mm)	Max. (Kg*f/cm ²)	Power Consumption VA	Cv Value	Max. Media Temp.	Size (mm)			Mounting hole (mm)	
			Water				L	H	h	A	
MK2-0825-8POM	NPT 1/4"	2.5	8	15	0.22	60°C	35	64	53	24	2-M4

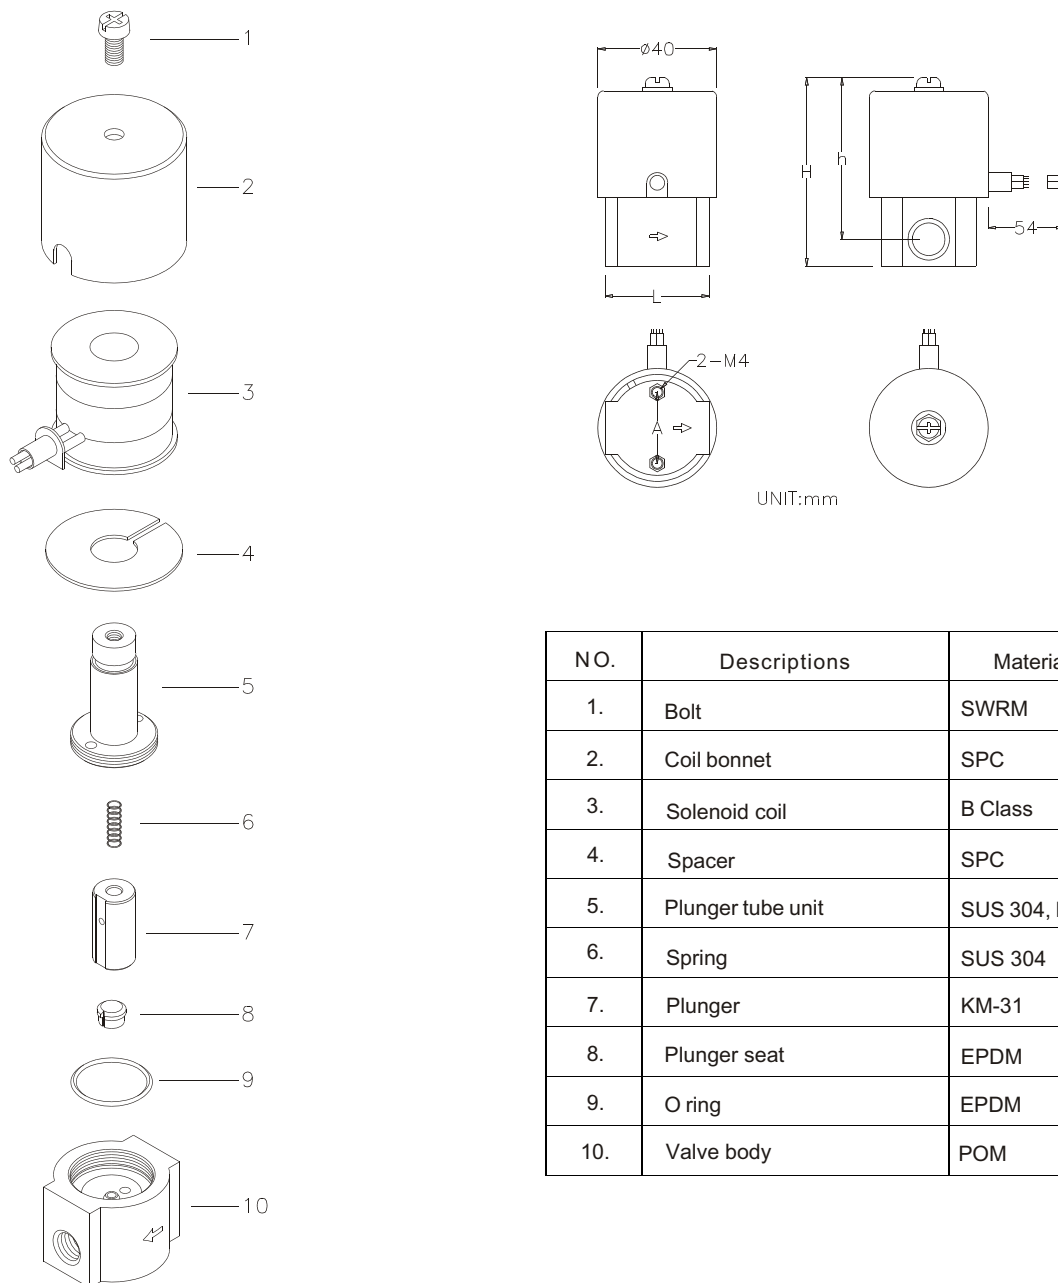

NO.	Descriptions	Material
1.	Bolt	SWRM
2.	Coil bonnet	SPC
3.	Solenoid coil	B Class
4.	Spacer	SPC
5.	Plunger tube unit	SUS 304, KM-31
6.	Spring	SUS 304
7.	Plunger	KM-31
8.	Plunger seat	EPDM
9.	O ring	EPDM
10.	Valve body	POM