

Specifications:



Rated voltage	100~120VAC/1-ph 200~240VAC/1-ph
Acting time	12/10sec. (50/60Hz)
Media	Oil, Air, Water
Fluid temp.	0~100°C Other temp. available on request
Pressure range	Max. 10 kgf/cm ²
Valve material	Cast Iron, SUS 304/316
Valve type	Flanged ball valve
Control method	ON/OFF Modulating
Insulation	IP 67
Certification	CE



Optional

- Heater
- Auxiliary Switches
- Build-in LED position indicator
- Voltage: 12 VDC; 24VAC/DC
- Potentiometer (5k Ohm)


JS-01, 02

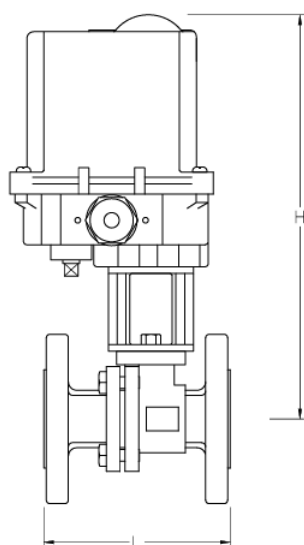



Dimension (mm)

MODEL	PIPE SIZE	L	H	D
JS-01-15F-BLV	1/2"	110	270	127
JS-01-20F-BLV	3/4"	120	275	127
JS-01-25F-BLV	1"	130	285	127
JS-02-35F-BLV	1-1/4"	140	295	127
JS-02-40F-BLV	1-1/2"	165	310	127
JS-02-50F-BLV	2"	180	315	127

Wiring diagram :110/220 VAC (1-Phase)

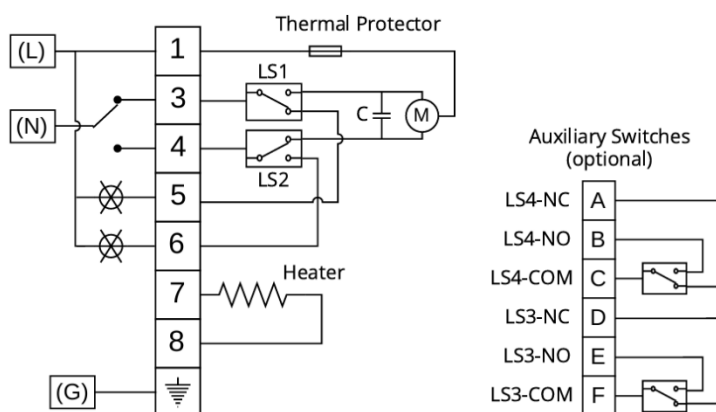



JS-03

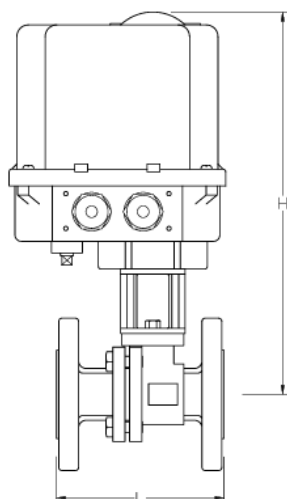

Dimension (mm)

MODEL	PIPE SIZE	L	H	D
JS-03-35F-BLV	1-1/4"	130	345	157
JS-03-40F-BLV	1-1/2"	140	360	157
JS-03-50F-BLV	2"	165	365	157
JS-03-65F-BLV	2-1/2"	190	420	157
JS-03-80F-BLV	3"	200	430	157

JS-03H~06H

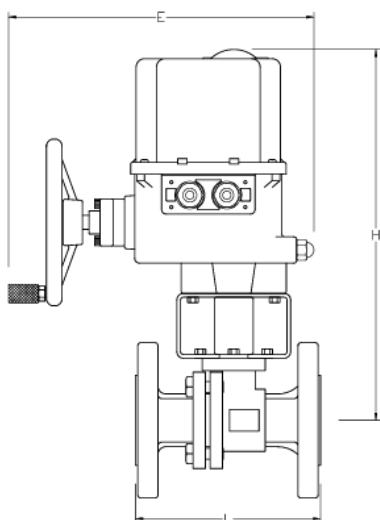

Dimension (mm)

MODEL	PIPE SIZE	L	H	D	E
JS-03H-35F-BLV	1-1/4"	130	410	163	340
JS-03H-40F-BLV	1-1/2"	140	425	163	340
JS-03H-50F-BLV	2"	165	430	163	340
JS-03H-65F-BLV	2-1/2"	190	485	163	340
JS-03H-80F-BLV	3"	200	495	163	340
JS-04H-100F-BLV	4"	230	530	163	340
JS-05H-125F-BLV	5"	300	580	163	340
JS-06H-150F-BLV	6"	340	630	163	340